


# Hydraulic spooling machine

DHSM-50

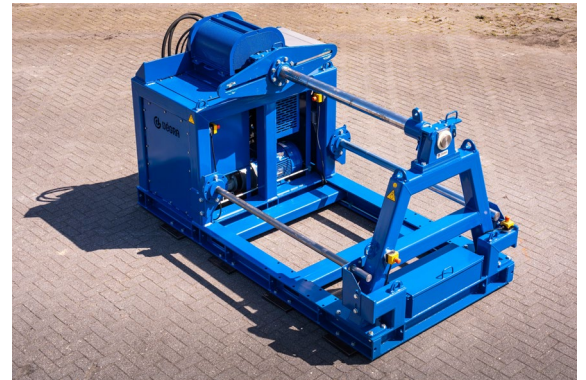

## Description


This versatile constant tension hydraulic spooling machine is equipped with an integrated 22 kW electric HPU that allows quiet and emission free operation. Comes with 3 shafts and their adapters with 60, 80 and 100 mm diameter.

### HIGHLIGHTS SPOOLING MACHINE

- Pulling force and speed can be adjusted on the machine. Suitable for heavy duty use.
- Equipped with unique manual controlled **compensated constant tension** system that works in both directions of rotation.
- Robust hydraulic servo control in a stainless-steel panel.
- **No PLC**, displays or other electronics/ sensitive components.
- Robust electrical starting system
- Built-in control systems
- Remote control box with 20 meters of wire

## Technical details

Max. torque	25 kNm
Electric power EHPU:	22 kW 400 V / 50 Hz
Supply flow (by EHPU):	100 L/min
Supply pressure (by EHPU):	200 bar
Max. reel weight:	5000 kg
Max. reel length:	1500 mm
Max. reel diameter:	2000 mm
Dimensions (LWH)	3200 x 1650 x 1750 mm
Total weight incl. EHPU	3000 kg
Gearbox	i=68
Hydraulic motor	Axial piston motor
IDEN no.	DG024

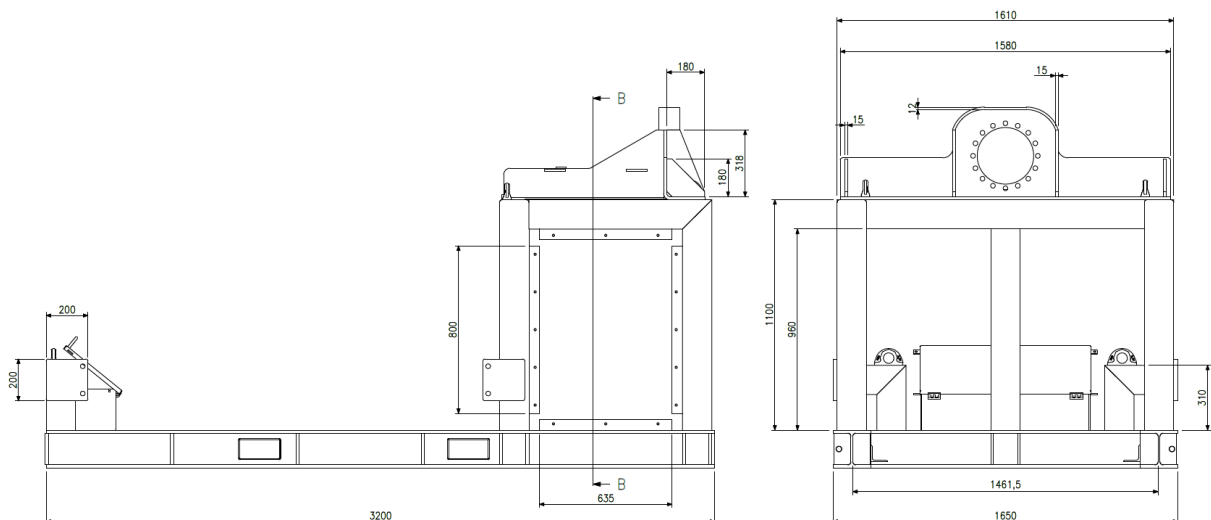



# Hydraulic spooling machine

DHSM-50

